

How-To-Do

How-To-Do – Image Update smartPanels

Content

- 1 General..... 2
 - 1.1 Information 2
 - 1.2 Reference 2
- 2 Revision History..... 5
 - 2.1 Changes..... 5

1 General

1.1 Information

This 'How-To-Do' describes, how you can install a new image on the smartPanel. For that you need a valid image and a storage medium (USB stick).

1.2 Reference

In this 'How-To-Do' the principal procedure is described by means of an example.

Liability for material defects and defects of this documentation, especially for the correctness, accuracy, freedom and protection or third party rights, completeness and / or usability - except for willful misconduct or bad faith - is excluded.


How-To-Do – Image Update smartPanels

Load firmware on USB stick


1. ➤ Go to www.vipa.com.
2. ➤ Click on 'Service / Support → Downloads → Firmware'.
3. ➤ Via 'HMI' navigate to your smartPanel, download the ZIP file for the update process and unzip the content in the root directory of the USB stick.

Prepare the smartPanel

1. ➤ Connect the smartPanel to the power supply.
⇒ The smartPanel starts with the *VIPA Startup-Manager*.
2. ➤ There is a button on the *initial screen* with a counter, which counts backwards. If you click on [Main] within this time, you will get to the *selection menu*.
⇒ You are now on the Windows® screen.
3. ➤ Open "System Tools" via 'Start → Programs → Tools'.

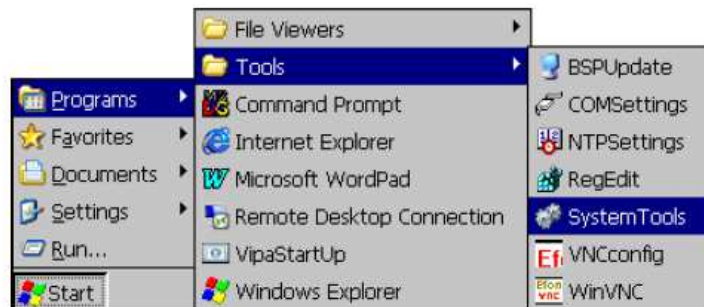


4. ➤ Click on [Soft Reset (Recovery mode)].

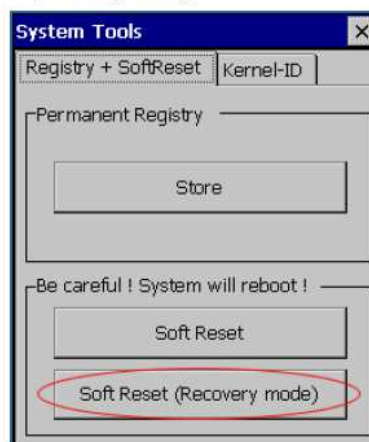

⇒ The smartPanel reboots. The "System Settings" interface opens.

5. ➤ Activate 'Autorun scripts from external storage' under 'Services' by moving the button to the right.

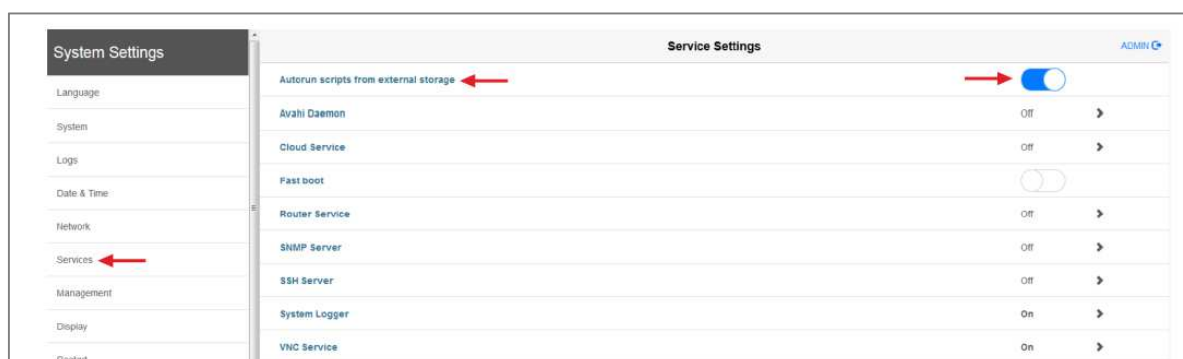

How-To-Do – Image Update smartPanels

Transfer firmware from USB stick into smartPanel

1. ➔ Insert the prepared USB stick into the USB port of the smartPanel.
 - ⇒ The update process starts automatically and can take several minutes.
After successful update the message "Process completed successfully" appears.
A log file "lastupdate.log" is generated and saved in the root directory of the USB stick.
2. ➔ Remove the USB-Stick and reboot the smartPanel.

2 Revision History

2.1 Changes

DATUM	ÄNDERUNGEN	BEARBEITER
14.06.2018	Document creation	T. Zerl
20.07.2018	Change Document	T. Zerl